

TURBO CLESSIDRA GLASS A9

9,0 KW

COLORS_



TECHNOLOGY



OPTIONAL



2 Uscite Posteriori (2 Motori) - Ventilazione Frontale (1 Motore) - Uscita Fumi Posteriore

2 Rear Outlets (2 Motors) - Front Ventilation (1 Motor) - Rear Exhaust Fume Outlet - 2 Salidas Traseras (2 Motores) - Ventilación Frontal (1 Motor) - Salida De Humos Trasera - 2 Sorties Arrière (2 Moteurs) - Ventilation Avant (1 Moteur) - Sortie De Fumée Arrière - 2 Ausgänge Hinten (2 Motore) - Front Gebläse (1 Motor) - Rauchausgang Hinten



Potenza Globale
Global Power
Puissance globale
Potencia global
Verbrennungsleistung

Rendimento totale
Total efficiency
Puissance globale
Potencia global
Pellet Wirkungsgrad

Peso
Weight
Poids
Peso
Gewicht

Consumo min-MAX
Min-Max consumption
Consommation min-MAX
Consumo min-maxi
Min-Maxi verbrauch

Temperatura gas di scarico
Exhaust gas temperature
Température des gaz d'échappement
Temperatura de los gases de escape
Abgas temperatur

Tiraggio richiesto in funzionamento
Draw required in operation
Dessiner nécessaire en fonctionnement
Dibujar requiero en la operación
Erfordertlicher Betriebszug

Uscita fumi
Chimney Output
Sortie conduit de cheminée
Salida conducto de humos
Rauchauslass

Ingresso aria
Air inlet
Entrée d'air
Entrada aire
Lufteinlass

Serbatoio pellet
Pellet tank
Réservoir
Depósito
Tank Fassungsvermögen

Assorbimento elettrico
Electrical consumption
Absorption électrique
Consumo de electricidad
Elektrischer Verbrauch

KW 9,0-24

% 89,2

Kg 175

Kg/H 0,6-2,2

°C 176





Pa 10

mm 80

mm 60

Kg 23

W 100

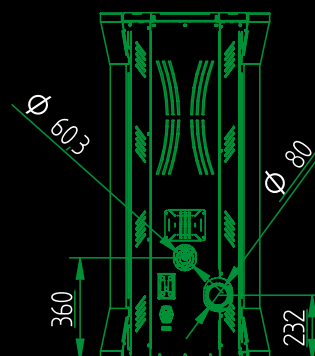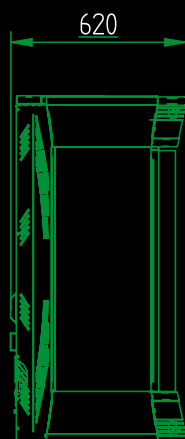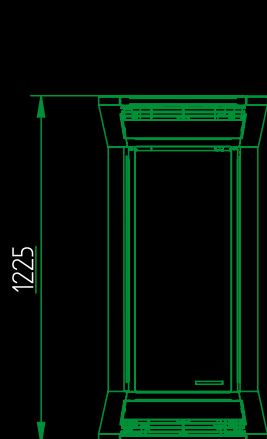

MORETTI DESIGN®